


Timberjack 1410B Forwarder

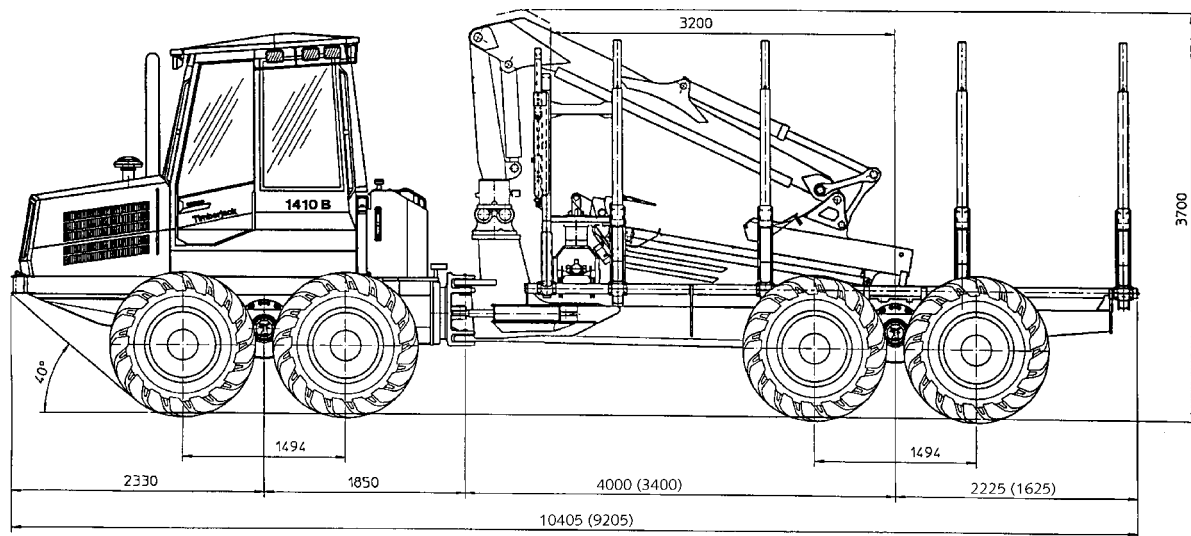

Technical Data (UK/Ireland specification)

Dimensions

Length	10405 mm
optional	9205 mm
Width	3070 mm (700-tires)
optional	2890 mm (600-tires)
Transport height	3700 mm
Ground clearance	605 mm
Wheelbase	5250 mm
Load rating	14 000 kg

Weight

Depending on equipment	
6-wheel	14 500 kg – 15 500 kg
8-wheel	16 000 kg – 17 000 kg

Load space

Length	5425 mm
optional	4225 mm
Width	2760 mm
Cross section	4.6 m ²
Fixed headboard with hydr. extension	
4 bunks, 8 stakes	

Engine

Cummins 6BTA-5.9, water-cooled turbocharged and inter-cooled 6-cylinder diesel engine	
Output	129 kW / 2000 rpm
Max. torque	694 Nm / 1500 rpm
Fuel tank volume	165 l

Transmission

Power train controlled by Timberjack TMC® (Total Machine Control). Hydrostatic-mechanical power transmission. Range gear with low and high range. Power distributed between the front and rear axles. Off-road driving, smooth no-surge start without dropping engine speed. Release of rear-wheel drive. Travel speed max. 22 km/h. Max. tractive force 175 kN.

Axles

Heavy-duty bogie axles with portal type bogie beams including patented balancing units. Similar axles at front and rear on 8-wheel. Hub planetaries in 6-wheel front axle. Power transmission through gears in bogie beams. Hydraulically operated mechanical differential lock front and rear. Disconnection of rear axle drive with high range.

Steering

Articulated frame steering with two hydraulic steering cylinders. Steering angle $\pm 42^\circ$. Proportional steering with an electric mini lever.



Tires	8 W	6 W
Front	700/50x26.5/16	700/55x34/14
(optional)	600x26.5/16	600x34/14
Rear	700/50x26.5/16	700/50x26.5/16
(optional)	600x26.5/16	600x26.5/16

Brakes

Service and working brakes are hydraulically actuated, oil immersed multiple disc brakes. Identical in both axles. Spring actuated parking- and emergency brakes in front and rear bogies. According to ISO 11169.

Hydraulic system

Controlled by Timberjack TMC® -system. Load-sensing hydraulic system with power control.

Pressure	24.0 Mpa
Pump volume	140 cc
Hydraulic oil reservoir	140 l

Electrical system

Voltage	24 V
Batteries	2 x 140 Ah
Alternator	140 A / 28 V
Working lights	10 x 140 W Twin Power

Cab

Spacious, light and comfortable cab giving the operator excellent vision in all directions. Efficient heating and air conditioning. The cab meets ISO standards for ROPS, FOPS, OPS. Thanks to the unique mounting of the cab, the noise level and vibrations are low. Noise level below 70 dB(A) (according to ISO 5131:1993). The cab can be raised and shifted to the side for easy service access. Radio/cassette player. Connection for cellular phone. Tinted polycarbonate windows. Air cushioned seat with air locked seat swivel.

Standard equipment

Timberjack TMC® (Total Machine Control)
 Stability brake
 Tow hook
 Electrical refill pump for hydraulic oil
 Engine oil drain hose
 Vacuum pump
 Mineral hydraulic oil
 Fire extinguisher ABE III
 Sprinkler system
 Hydraulic steps

Exhaust pipe support
 Neck support
 Tool box
 Spare parts catalogue/Operator's manual
 Decals in English

Optional equipment

Hydraulic headboard transfer with hydraulic extension
 Preparedness for clambunk
 Sweep wire cabin protection
 Protective screen for radiator grille
 Biodegradable hydraulic oil
 Separate 550 l fuel tank
 Mechanical fuel refill pump
 Electrical fuel refill pump
 Decking blade
 Wipers on rear side windows
 Sun blinds in all windows
 Chains, tracks
 Spare wheels and wheel rims

Loader TJ71S

General for loader


In all types the slew torque is 27.0 kNm with the angle 380° and the gross lifting moment 110 kNm.

TJ71S F85	
Reach	8.5 m
Length of extension	2650 mm
Max. gross load at max. outreach	930 kg

(optional)	
TJ71S F72	
Reach	7.2 m
Length of extension	1400 mm
Max. gross load at max. outreach	1240 kg

(optional)	
TJ71S F100	
Reach	10 m
Length of extension	4200 mm
Max. gross load at max. outreach	690 kg

Max gross load incl. link, rotator and grapple weight.

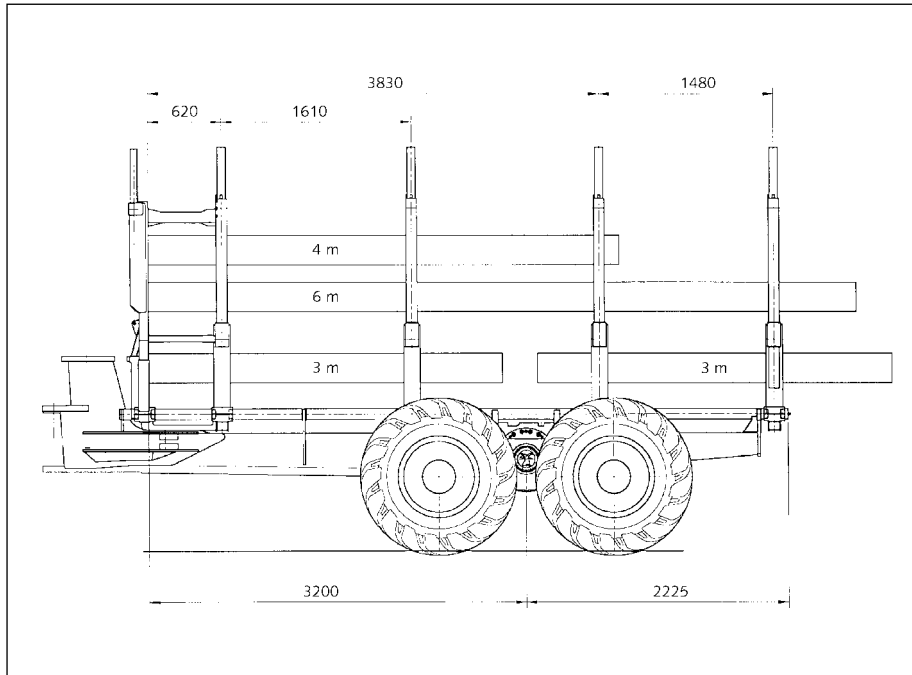

The manufacturer reserves the right to make changes or add improvements without incurring any obligation to make such changes on machines manufactured previously.

©Timberjack and the donkey symbol are registered trademarks of Timberjack Inc. Printed in Finland by Offset Ulonen Oy, EN/10/01

Timberjack

Doing more

www.timberjack.com